

Padding Upgrade Options

WPUP3N



Upgrade any 2" neoprene foam wall padding to 3" neoprene foam for added player protection or to meet local codes or project specifications.

COLOR SELECTION

Select desired pad color from:

(www.ipibybison.com/pdfs/vinyl_padding_colors_ipi.pdf)

Specify Color: _____

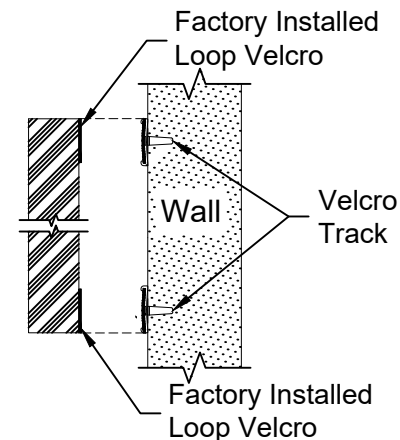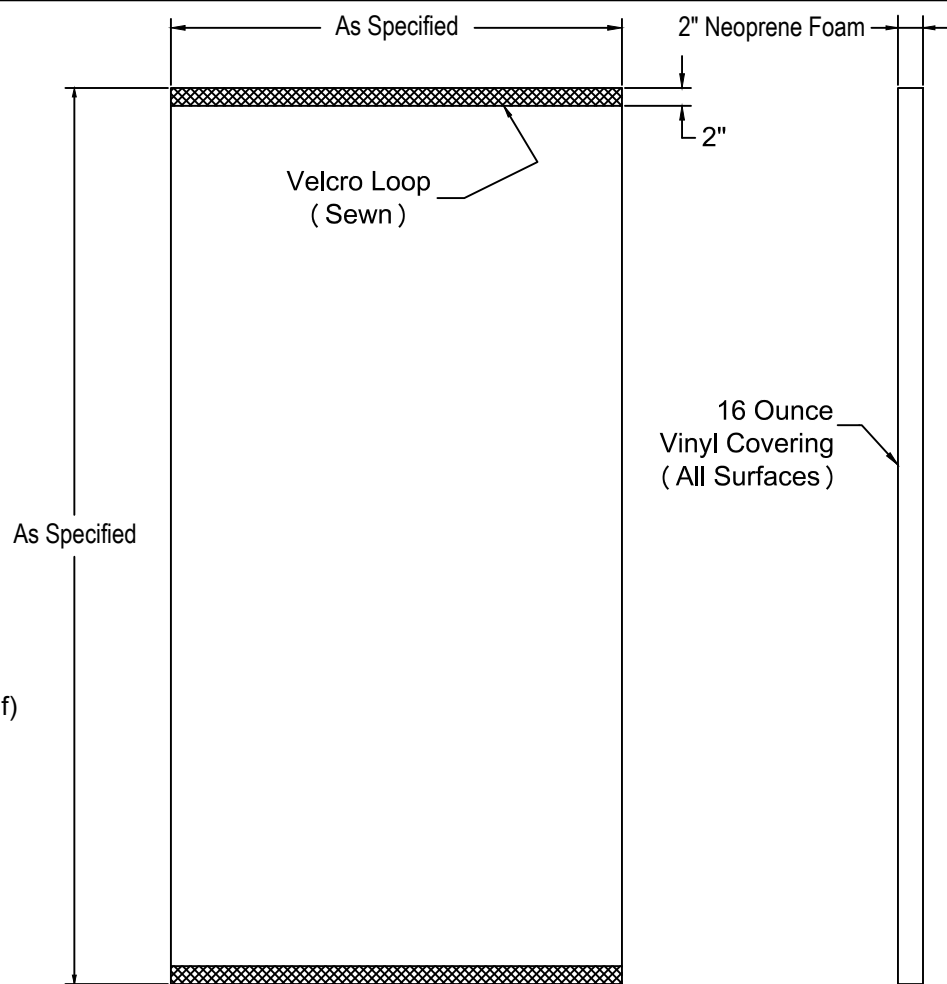

Firewall™ Wall Padding Specifications

Solid color Firewall padding including custom corner, column, door and stage padding is constructed of neoprene foam with Indentation Load Deflection (ILD) of 25-45 pounds, 2" thickness at 25% deflection per ASTM D3574 Test B1 and a density of 6.2 pounds per cubic foot per ASTM D3574 Test A. Firewall neoprene foam passes California Fire Code TIB 117:2013. 16 ounce vinyl covering has a ASTM D2261 tear strength of 92 x 83 pounds per inch and has been treated for mildew and UV protection. Vinyl conforms to NFPA-701 CSFM and Class A ASTM E-84. Assembled padding has been tested and meets NFPA 286. "2" wide heavy duty velcro loop is sewn to the rear of the padding at the top and bottom. A molded track with 2" wide heavy duty velcro hook is attached to the wall allowing secure attachment and removal.



PRODUCT SPECIFICATION: WP2NSVS

FIREWALL SOLID COLOR VELCRO MOUNT SOFT BACK WALL PADDING

REVISED 07/02/19